

HMZ-333A1 Humidity module specifications

1. Application range :

The HMZ-333A1 module consist of an HCZ sensor and integrated circuit to provide a linear DC Voltage for 0-100%RH to enable easy user application of the HCZ sensor. They are specifically designed for use appliances and controllers.

Feature	Application
Wide humidity operation range	Air condition, humidifier, Dehumidifier.
Linear DC Output	Humidity controller, Humidity transmitter.
Easy operation	Hygrometer, Hygro-recorder.
Long-term stability	Copying machine.
Small and economical	Clock, Weather-forecast barometer.

2. Electrical characteristics :

2.1 Sensing element (Humidity) : HMZ-333A1 Humidity sensor “ GHITRON HCZ”

2.2 Supply Voltage (Vin) : 5VDC±5%

2.3 Current Consumption : 5mA max :(2mA avg.)

2.4 Operating Range

Temperature : 0 to 60°C

Humidity : 95%RH or less

2.5 Storage:

Temperature : -20 to 70°C

Humidity : 95%RH or less

2.6 Humidity transmitting

Range : 20 to 90%RH

2.7 Accuracy

Humidity : ±5%RH at 25°C , 60%RH , Vin=5.00VDC

2.8 Humidity Output 0~3.3V

At 25°C , Vin=5.00VDC


Signal(Reference) : (Output Impedance approx:5KΩ)

Humidity(%RH)	20	30	40	50	60	70	80	90
Output Voltage(V)	0.67	1.02	1.36	1.68	1.98	2.26	2.51	2.73

This document is the exclusive property of Ghitron and shall not be reproduced or copied or transformed to any other format without prior permission of Ghitron. 本資料為積創專有之財產，非經許可，不得複製、翻印或轉變成其他形式使用。	Page 1 of 1	
	App. No.	EC#083003

2.9 Humidity Output 0~3.3V characteristics

HMZ-333A1 Humidity Output 0~3.3V characteristics

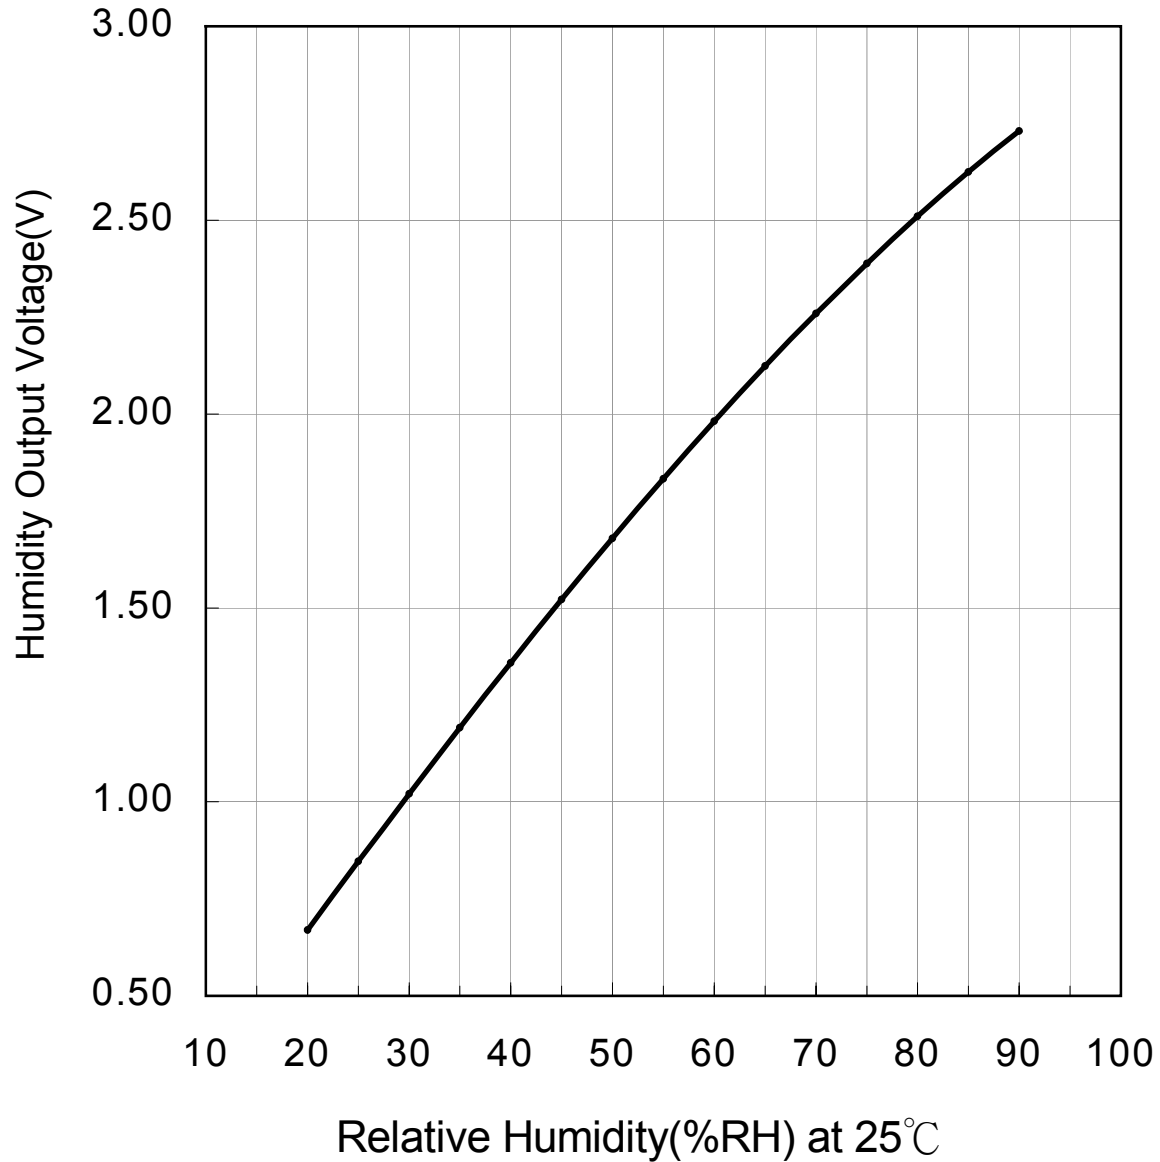

This document is the exclusive property of Ghitron and shall not be reproduced or copied or transformed to any other format without prior permission of Ghitron. 本資料為積創專有之財產，非經許可，不得複製、翻印或轉變成其他形式使用。

Page 2 of 2

App. No.

EC#083003

2.10 HMZ module Humidity Output 0~3.3V v.s Temperature characteristics


Temp %RH	10°C	15°C	20°C	25°C	30°C	35°C	40°C
20%RH	0.76	0.73	0.70	0.67	0.63	0.60	0.56
30%RH	1.06	1.03	1.03	1.02	0.99	0.96	0.93
40%RH	1.36	1.34	1.35	1.36	1.34	1.32	1.29
50%RH	1.67	1.66	1.67	1.68	1.67	1.66	1.64
60%RH	1.97	1.97	1.98	1.98	1.98	1.98	1.96
70%RH	2.25	2.25	2.26	2.26	2.26	2.26	2.25
80%RH	2.51	2.51	2.50	2.51	2.50	2.50	2.48
90%RH	2.73	2.72	2.70	2.73	2.70	2.68	2.66

Remark: Accuracy : $\pm 5\%$ RH at (25°C, 60%RH, $V_{in}=5.00VDC$)

Output range : 1.83~2.12 V

3. Configuration & Dimensions (Units :mm) :

3.1 Model No. HMZ-333A1 Drawing

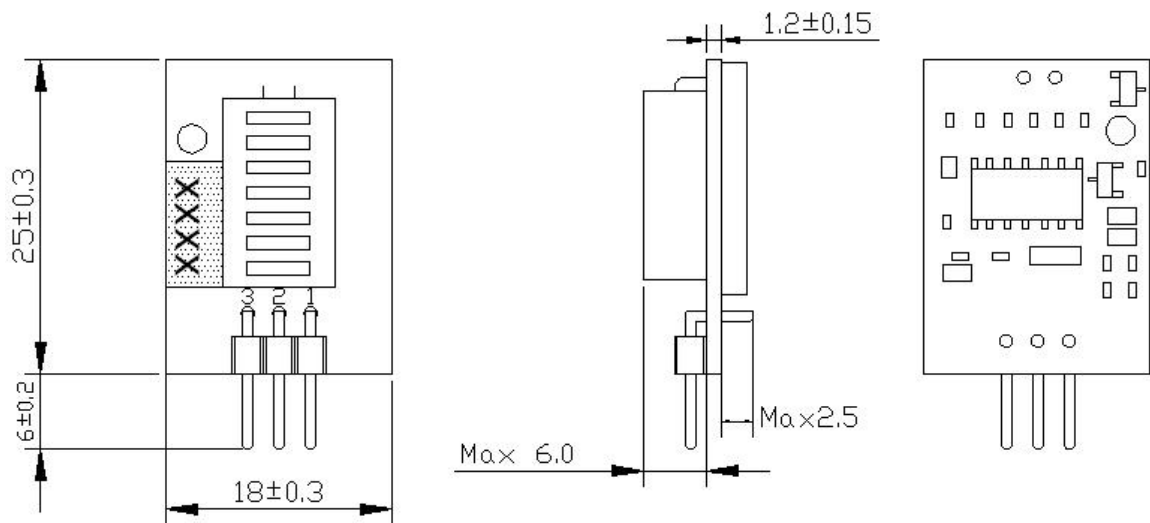

Terminal Connection :


Terminal	Content.
1	Power Source 5V DC.
2	Humidity Output.
3	GND.

Remark : Please pay attention to the power source and GND polarity position.

<p>This document is the exclusive property of Ghitron and shall not be reproduced or copied or transformed to any other format without prior permission of Ghitron. 本資料為積創專有之財產，非經許可，不得複製、翻印或轉變成其他形式使用。</p>	Page 3 of 3	
	App. No.	EC#083003

4. Typical Applications :

4.1 Pin2 Humidity output (DC:V)

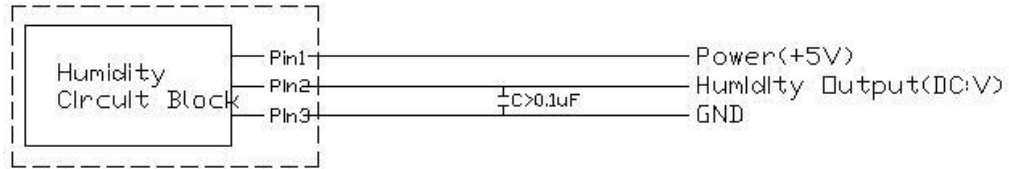

5. Order Form :

HMZ-333A1 is the module with the 0~3.3V voltage output for humidity ◦

HMZ-333A1 Configure of definition.	
Input Voltage	5V
Humidity Output Voltage	0~3.3V
Terminal Connector	2211R-03G-LP (3 pins, Pitch = 2.54mm).
Accuracy	±5%RH
Output Range	20%RH~90%RH

6. Reliability test :

No.	ITEM	METHOD	REQUIREMENT
6.1	Impact test	To drop Module 3time at random on to a hard wooden plate from 1meter above high.	No breakage, nor cracks. Should be electrically normal , %RH < ±5%RH
6.2	Vibration test	Vibration test in X-Y-Z axis for 30min.under 10-55Hz frequency, 1.5mm(10-55-10Hz) amplitude.	No breakage, nor cracks. Should be electrically normal , %RH < ±5%RH
6.3	Heat resistance	1000 hours@ 70°C	%RH < ±5%RH
6.4	Cool resistance	1000 hours@ -30°C	%RH < ±5%RH
6.5	Humidity resistance	1000 hours@ 60°C/ 90%RH.	%RH < ±5%RH
6-6	Temperature cycle test	Repeat 100 cycles , Each cycle: 30 minutes@-30°C/30 minutes@85°C	%RH < ±5%RH
6.7	Loading test	Room Temperature / Humidity , Input +5V. for 1000hours.	%RH < ±5%RH

Remarks :

- (1) All standard figures are based on humidity variation under 60%RH(25°C)
- (2) Upon completion of all tests. The module will be left over under nominal environment and humidity for 24hours.

This document is the exclusive property of Ghitron and shall not be reproduced or copied or transformed to any other format without prior permission of Ghitron. 本資料為積創專有之財產，非經許可，不得複製、翻印或轉變成其他形式使用。	Page 4 of 4	
	App. No.	EC#083003

7. Packing :

There are 50 pieces of modules to be packed in one tray.

8. Caution remarks on operation :

8.1 To avoid direct application of DC voltage on humidity sensor.

8.2 To protect sensor from dewfall and drenching.

8.3 To avoid and operation of humidity sensors in the following environmental ambient.

8.3.1 Salt

8.3.2 Inorganic gas Sulfide dioxide, Chlorine, Ammonium, etc.

8.3.3 Organic gas Alcoholic, Glycols, Aldehydes, etc.

8.4 Recommendable storage condition

Temperature range 10~40°C

Humidity Range 90%RH or Less.

8.5 Do not store humidity sensors long period of time in an 70°C ambient, due to some occasion of degradation on sensor housing case.

Remark : We have the right to revise specification and product configurations without notice.

This document is the exclusive property of Ghitron and shall not be reproduced or copied or transformed to any other format without prior permission of Ghitron. 本資料為積創專有之財產，非經許可，不得複製、翻印或轉變成其他形式使用。	Page 5 of 5	
	App. No.	EC#083003